

ROLLMAX SERIES - REBUILD READY

Remco's RollMax Series can easily be serviced and rebuilt in a matter of minutes, the only tool required is a wrench. All of this is possible while the pump remains attached to the drive shaft and the plumbing remains intact.

1. Loosen and remove the 4 cap bolts.
2. Easily slide the pumps endplate off of the shaft, be careful not to damage the shaft seal.
3. Inspect and replace worn rollers as needed with our universal repair kits.
4. Be sure to lubricate the shaft seal before reinstalling.
5. Carefully reinstall pump endplate and cap bolts.




ROLLMAX R880 SERIES

ROLLMAX 8 ROLLER CONFIGURATIONS

Item Number	Description
R880C	8 Roller, Cast Iron, CCW Rotation, 15/16" Shaft
R880SS	8 Roller, Stainless Steel, CCW Rotation, 15/16" Shaft
R880C-TAK	8 Roller Kit, Cast Iron, CCW Rotation, 15/16" Shaft, Torque Arm and Chain, Multi-Speed Coupler

PUMP SPECIFICATIONS

- Maximum Flow Rate: 24.5 GPM
- Maximum Pressure: 150 PSI
- Maximum Speed: 1000 RPM
- Rotation: Counter Clockwise
- Shaft Size: 15/16"
- Ports: 1" FNPT

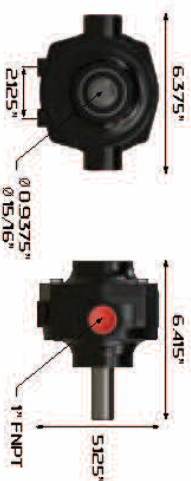

CAST IRON



STAINLESS STEEL



ROLLMAX R880 SERIES PERFORMANCE CHART

PSI	540 RPM	850 RPM	1000 RPM
0	13.0	20.0	24.0
20	12.4	19.8	23.3
40	11.6	19.1	22.4
100	10.0	17.4	20.7
150	8.5	16.0	19.3

(DIMENSIONS MAY VARY BY MODEL)